

# MCD95

## Dehumidifier



### Product description

The MCD (Munters Configurable Dehumidifier) combines traditional Munters strengths like efficiency and robustness with modern state of the art technology like modulating RH control and multiple language display.

Low energy consumption and reliability are important in today's processes. The new electronic control panel uses a touch display for a number of different energy saving opportunities including optional Variable Frequency Drive (VFD).

The Energy Recovery Purge (ERP) design is available as a standard option in order to save energy. The MCD95 is equipped with a number of alarm functions to ensure total control of the dehumidification process. Frame casing and outer panels are made of corrosion resistant AluZink and coated in RAL 7035.

The MCD95 dehumidifier covers a wide range of needs by providing a variety of standard functions. The numerous options will allow pre- and post treatment by simply adding mechanical and electrical components.

The MCD95 can be supplied with 3 different reactivation alternatives - electrical, steam and gas. A service indicator activates when a preventative service is due, this is a standard feature. To make installation easier the process fan inlet has been designed to allow for different outlet positions.

The electrical equipment conforms to EN 60204 (IEC204) standards. The electrical system is designed for voltages up to 415V and an ambient temperature of up to 50°C. The MCD series of dehumidifiers conform to both harmonised European standards and technical specifications for CE marking.

### Munters Rotor Technology


Munters desiccant rotors are highly effective moisture-adsorbing substances. An option for the MCD-series rotor technology is the ERP solutions reducing the energy consumption.

#### PRODUCT INFORMATION


## MCD95

### Features

- Efficient dehumidification between -20°C and 40°C
- Modulating humidity control incl. temp sensor
- Touch screen control
- Filter and rotor stop alarm as standard
- Energy saving options
- Service and running indicator alarm as external indicators

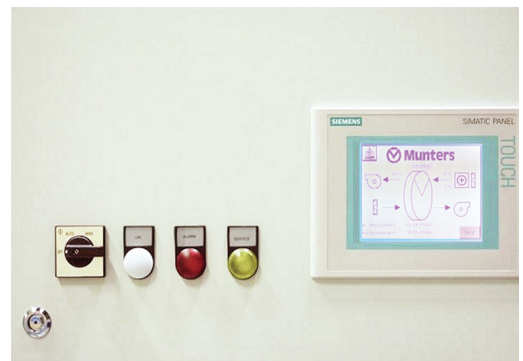


### Energy Recovery Purge (ERP)

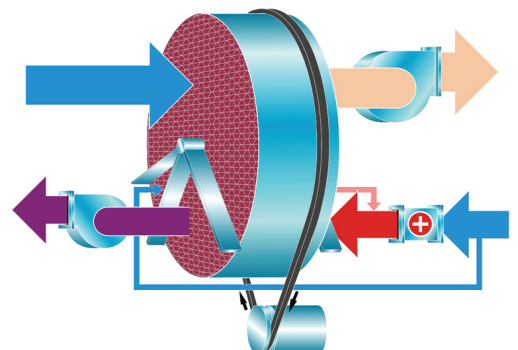

## Model MCD95

Diagram measurements are for reference only.

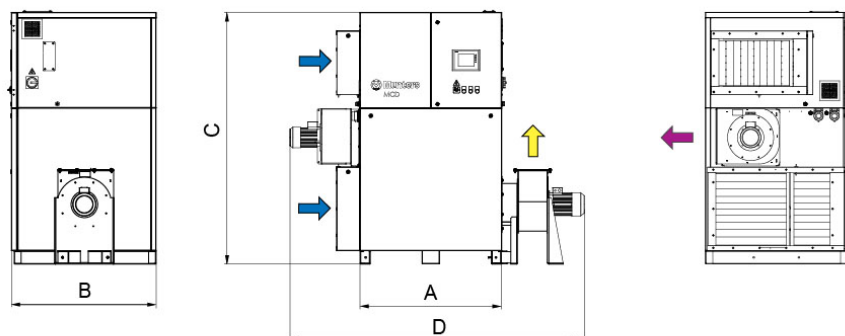

Height (C)	Dry air	Wet air	Weight	Width (A/D)	Depth (B)
2204	370x770	249x420	734	1068/2433	1307

## Technical Specification

### Process Air

Rated airflow (m <sup>3</sup> /h)	9500
Maximum static pressure (Pa)	300
Fan power (kW)	7,5

### Reactivation air

Rated airflow (m <sup>3</sup> /h)	1800
Fan Power (kW)	1,5
Static Pressure at rated airflow (m <sup>3</sup> /h)	300

### Total power, voltage and current (amps/phase)

Total power (kW) Electrical	69,3
Total power (kW) Steam/Gas	9,3
380V 3-50 Hz (A) Electrical	109,9
380V 3-50 Hz (A) Steam/Gas	18,8
400V 3-50 Hz (A) Electrical	104,4
400V 3-50 Hz (A) Steam/Gas	17,8
415V 3-50 Hz (A) Electrical	100,6
415V 3-50 Hz (A) Steam/Gas	17,2
Max steam working pressure (bar) (g)	7
Gas consumption (m <sup>3</sup> /h)	5,91
Natural gas pressure (mbar)	18-49
Max sulphur content (ppm) HPS Rotor	30
Steam consumption 3 bar (g/s)	28,12
Steam consumption 5 bar (g/s)	28,76
Total power with ERP,Electrical (kW)	69,9
Steam consumption with ERP 3 bar (g)	28,12
Gas consumption with ERP (m <sup>3</sup> /h)	5,91


Moisture removal 20°C, 60% (kg/24hr)	1150
Steam consumption with ERP 5 Bar (g)	28,76

### Miscellaneous Data

Operating temperature (°C)	-20-40
Max. noise level, all ducts connected (dbA)	-
IEC protective class (unit)	44
IEC protective class (electrical panel)	54
Filter class	G3
Motor winding insulation	F

## Dehumidification Capacity


Approximate capacity in kg/h at different inlet process air relative humidity % RH

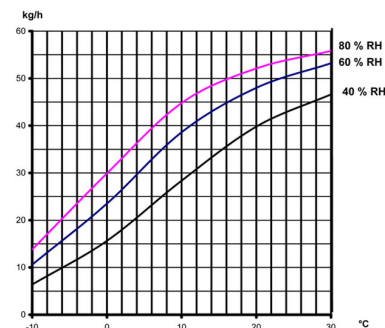

Process air temperature

## Options

- \* Variable Frequency Drive (VFD) for process air fan
- \* Energy Recovery Purge (ERP)
- \* Pre-react-heater
- \* Insulated process air inlet
- \* Upgrade options for controller for pre- and post treatment
- \* Mirror handed
- \* Airflow indication
- \* Filters F5, F7 or G4/F7 combination
- \* Dewpoint sensor

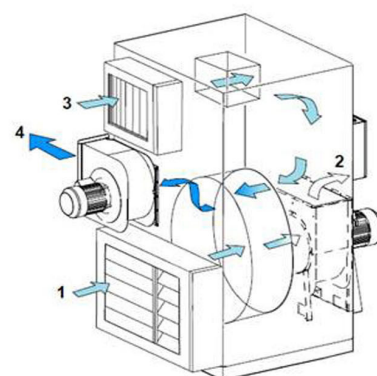

1. Process air
2. Dry air
3. Reactivation air
4. Wet air