

MCD Dehumidifier



Product description

The MCD100 dehumidifier now includes many functions as standard that were often requested as options.

The MCD (Munters Configurable Dehumidifier) is using the temperature independent sorption principle based on HPS (High Performance SilicaGel) rotor as the dehumidification method. It works efficiently in a wide temperature range - 20°C and 40°C. For this reason the dehumidifier is suitable for a lot of different applications.

Low energy consumption and reliability were important targets in the development work. The new electronic control panel using a touch display offers a number of different energy saving opportunities including Variable Frequency Drive (VFD).

The MCD100 is equipped with a number of alarm functions to ensure a total control of the dehumidification process. The frame casing is made in corrosion resistant AluZink as well as the outer painted panels.

The MCD100 can be supplied with 3 different reactivation alternatives – electrical, steam and gas. A service indicator, activated when there is a need for a prevented service, is a standard feature. To make installation easier the process fan has round connections as standard, which allows for different outlet positions depending on installation requirements.

The electrical equipment conforms to EN 60204 (IEC204) standards. The electrical system is designed for voltages up to 415 V and an ambient temperature of up to 50 °C. The MCD series of dehumidifiers conform to both harmonised European standards and technical specifications for CE marking.

Munters Rotor Technology


Munters desiccant rotors consist of corrugated composite material with highly effective moisture-adsorbing substances.

PRODUCT INFORMATION

MCD100

Features


- Efficient dehumidification between - 20°C and 40°C
- Electronic control panel – optimised running saves energy
- Control system with many possibilities
- Service indicator as standard

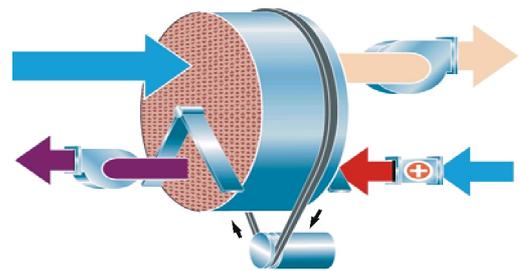

The Humidity Expert


Model MCD100

Diagram measurements are for reference only.

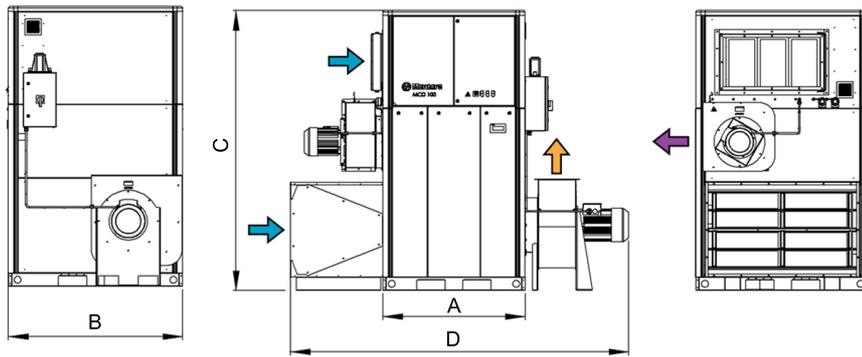

Dehumidification Capacity

Approximate capacity in kg/h at different inlet process air relative humidity % RH

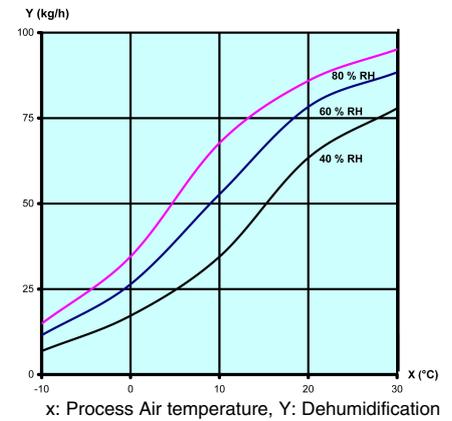

Width (A/D)	Depth (B)	Height (C)	Dry air	Wet air	Weight
1300/3090 mm	1590 mm	2575 mm	420x830 mm	665x304 mm	1142 kg

Technical Specification

IEC protective class (electrical panel) IP33

Process air

Rated airflow (m ³ /h)	10000
Available static pressure (Pa)	300

Reactivation air

Rated airflow (m ³ /h)	3060
Available static pressure (Pa)	300

Total power, voltage and current (amps/phase)

Total power (kW) Electrical	119 (50Hz)
Total power (kW) Steam/Gas	17 (50Hz)
380V 3-50 Hz (A) Electrical	188
380V 3-50 Hz (A) Steam/Gas	33
400V 3-50 Hz (A) Electrical	179
400V 3-50 Hz (A) Steam/Gas	32
415V 3-50 Hz (A) Electrical	172
415V 3-50 Hz (A) Steam/Gas	31
Max steam working pressure (bar)	7
Steam consumption 3 bar (g/s)	48
Steam consumption 5 bar (g/s)	49

Miscellaneous data

Operating temperature (°C)	-20°C/40°C
Air filter standard	G4
IEC protective class (unit)	IP33

Options

- G4+F7 filterbox, panel filter
- F7 filterbox, panel filter
- Process fan with frequency control
- Sensors (RH, absolute humidity and low dew point)